

PCMCIA
Fax Modem
ENW-5601
Installation Guide

INTRODUCTION

The ENW-5601, 56k PCMCIA Fax Modem is a credit-card-size Type II PC card that complies with the PCMCIA 2.1 standards.

The ENW-5601 is Bell, ITU-T (formerly CCITT) compliant and Hayes AT command compatible, so that it can be used worldwide with today's popular communication software programs. You will be able to send and receive faxes to/from any Group 3 compatible fax machine. Using standard phone lines, the data communication functions of the modem will enable you to successfully hook up to the Internet, transmit E-mail, send and receive information and communicate with other PCs, Bulletin Board Services (BBS) or computer networks such as CompuServe

Specifications

Data:

V.90, V.34bis, V.34, V.32bis, V.32, V.22bis, V.22, and V.21, Bell 212A and Bell 103

Fax:

V.17, V.29, V.27ter, and V.21 channel 2 Group 3 send and receive facsimile

Error Correction:

V.42 and MNP 2-4

Data Compression:

V.42bis and MNP 5

Communication software compatible commands:

Hayes compatible enhanced "AT" command set

Fax Service Class 1 commands

Built-in DTE interface:

DTE speed up to 115,200 bps


16C550 UART interface

System Requirements

- A notebook or desktop computer with PCMCIA type II or III slot.
- A telephone line with RJ-11 jack.
- A CD-ROM drive.
- Windows 95, 98 or Windows NT pre-installed.

HARDWARE INSTALLATION

1. Locate the PCMCIA slot of your system.
2. Align the ENW-5601 PC Card toward the PCMCIA slot. Push evenly and steadily until it is seated.

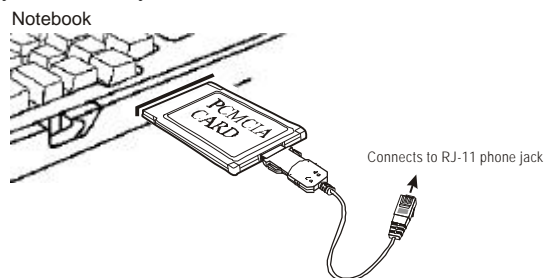

3. Connect the other end of the PC Card cable to the telephone line outlet.
4. You are now ready to continue the software installation.

For Windows NT does not support "Hot Insert/Remove", be sure to complete the hardware installation as described above before you start Windows NT and software installation.

SOFTWARE INSTALLATION

Installation for Windows 95


1. As soon as the PCMCIA Fax Modem 56K PC is inserted into the PCMCIA slot, Windows automatically detects the new hardware device and prompts the following message.



2. Insert the device driver compact disc into your CD-ROM drive. When the following dialog box appears, click the **Other Locations** button.




3. Type the CD-ROM drive letter followed by **driver\win95**. Or you may click the **Browse** button to select the **driver\win95** folder in your CD-ROM drive. Click **OK**.

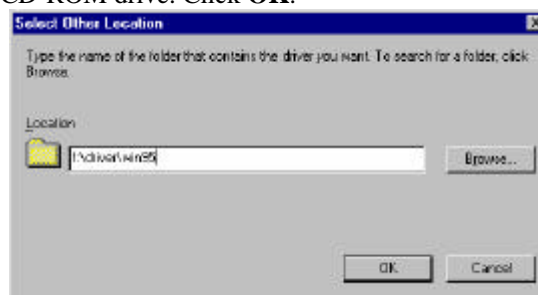


4. When the following figure appears, click **Finish**. The Installation program will continue.



5. When the following figure appears, click **OK** to continue.

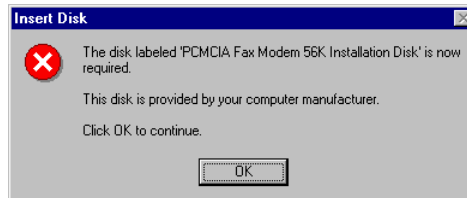

6. Repeat Step 3 as described above.

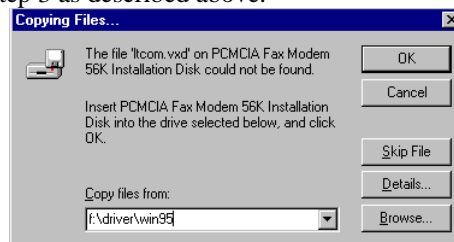

7. Follow the on-screen instruction to continue.




8. When finished, press **Finish** to complete the installation.
Remember to restart Windows 95 to activate the new device.




Installation for Windows 98

1. As soon as the PCMCIA Fax Modem 56K PC is inserted into the PCMCIA slot, Windows automatically detects the new hardware device and the following message will be prompted.

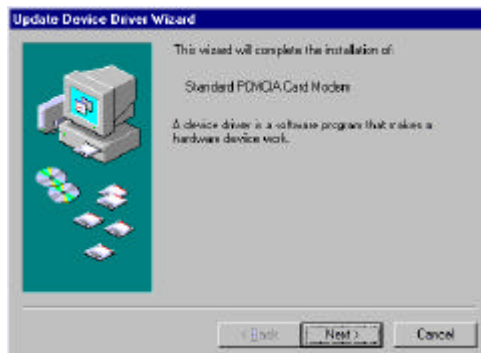


2. Insert the device driver compact disc into your CD-ROM drive. When the following dialog box appears, click **Next**.

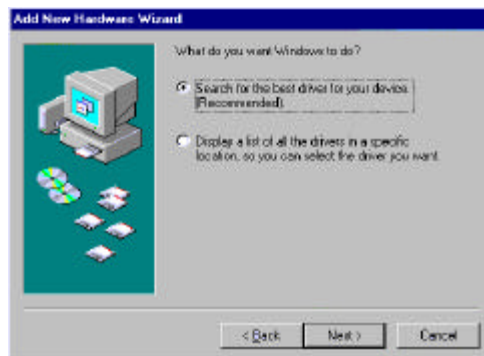


3. Select **Specify a location** when the following figure appears. Enter the CD-ROM drive letter followed by **driver\win98**. Click


Next. Or you may click the **Browse** button to select the **driver\win98** folder in your CD-ROM drive.


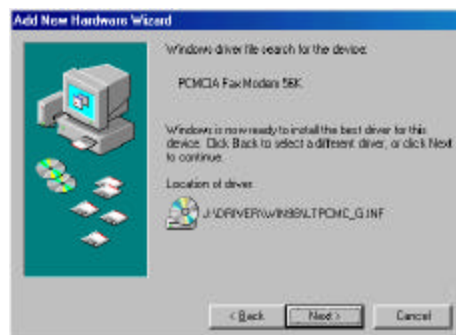


4. When the following figure appears, click **Finish**. The Installation program will continue.

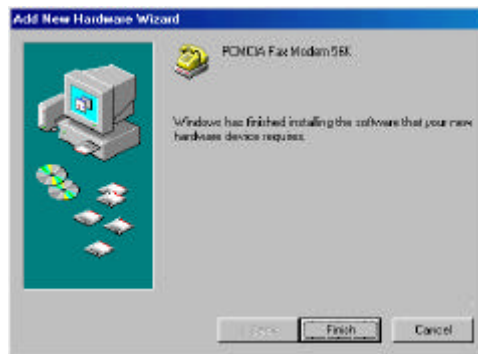

5. Follow the on-screen instruction to proceed.

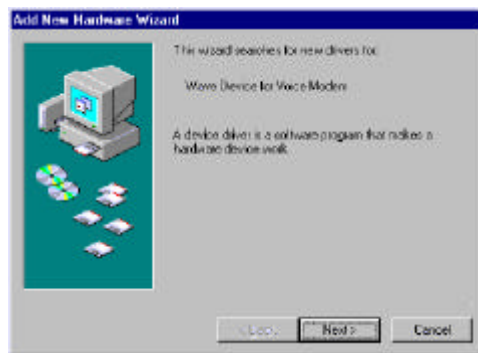

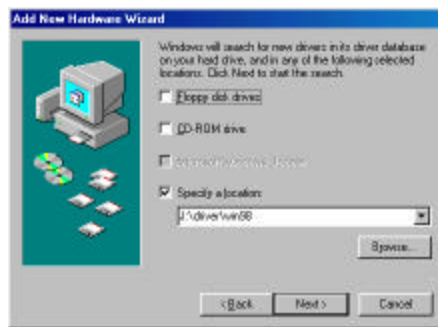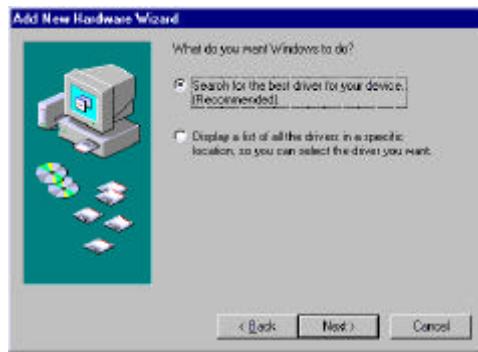



6. The installation program will proceed automatically. Click **Finish** to complete the installation.



Installation for Windows NT

1. Before you start Windows NT, make sure the PCMCIA Fax Modem 56K PC Card has been properly inserted into the free PCMCIA slot of your computer.
2. Load the device driver compact disk in the CD-ROM drive.
3. Start Windows NT.
4. Go to **My Computer**.
5. Click the CD-ROM drive. Click the **driver\winnt** folder. Or you may click the **Browse** button to select the CD-ROM drive and the **driver\winnt** folder.
6. Double-click **setup.exe**. The installation program will proceed automatically.

CE

Part No: EMQ-5601