


An sample about how to trigger ATM/POS recording with POS simulator



PROPERTY RIGHTS RESERVED (wb)

1、 DVR setup


- 1) Enter ATM/POS menu

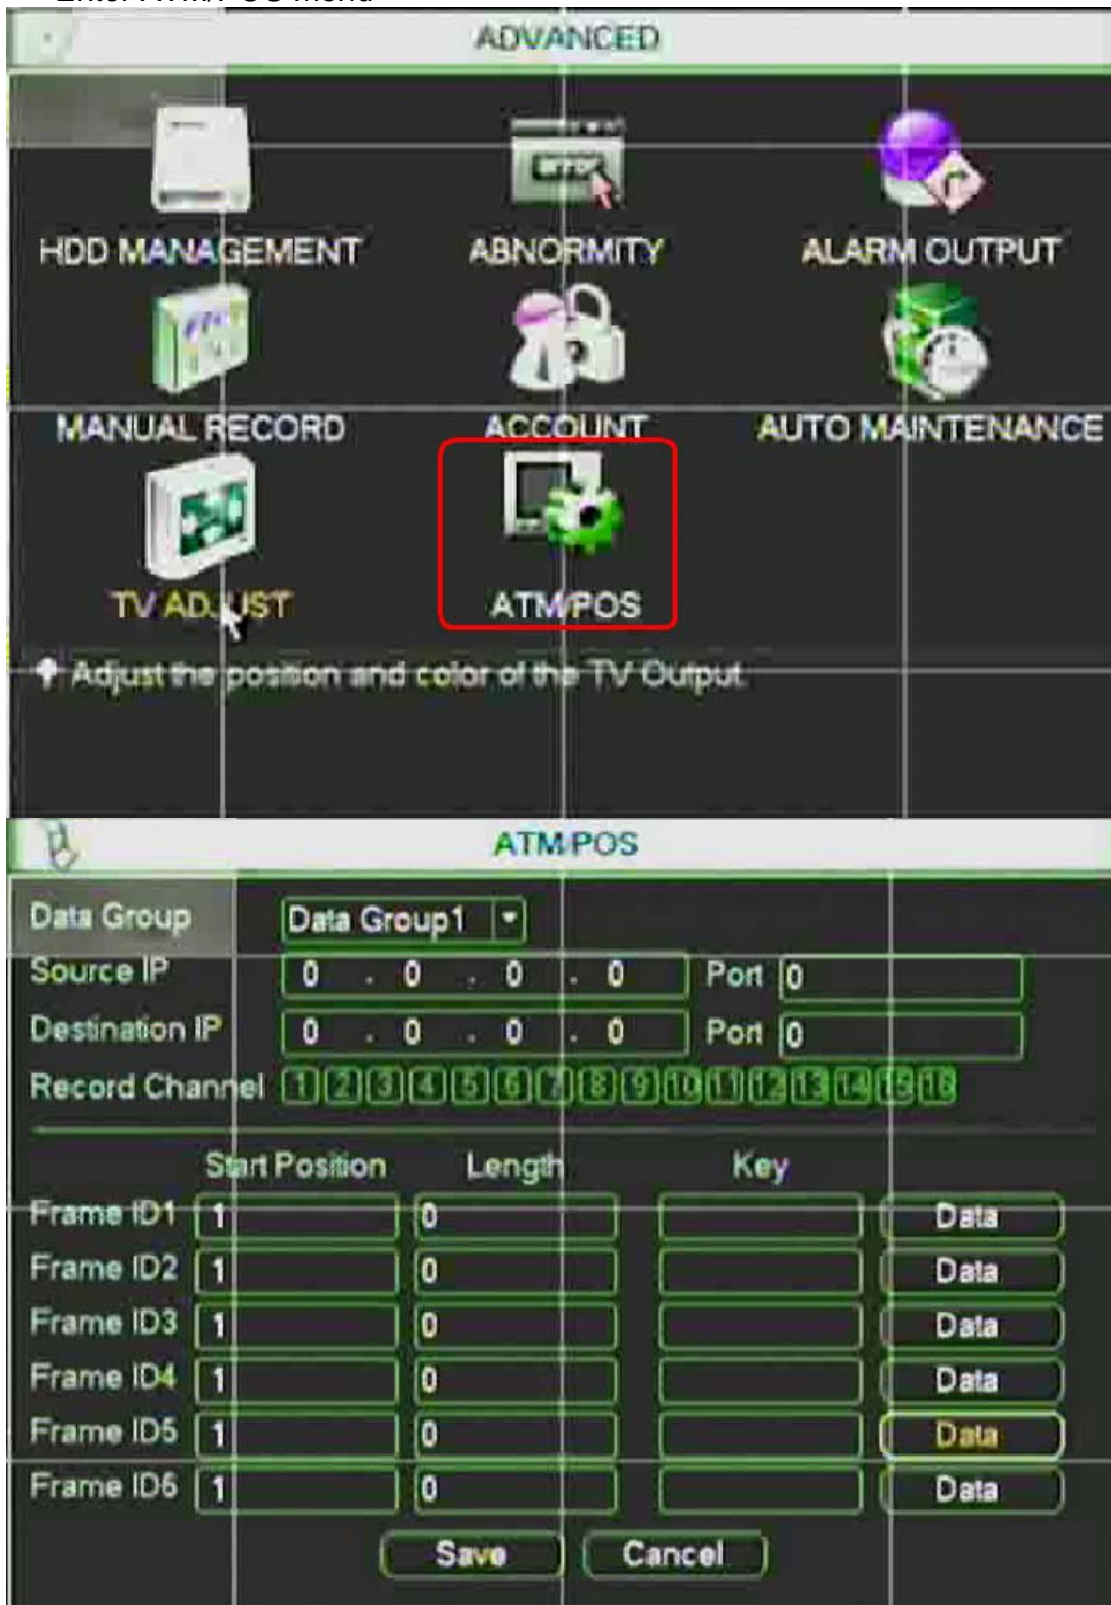


- A. Set source IP(PC ipaddress run POS simulator) and destination Ip(DVR ipaddress)
Port please set to:0
And Record Channel

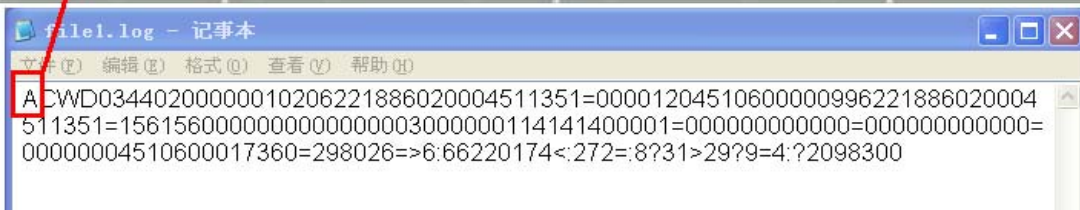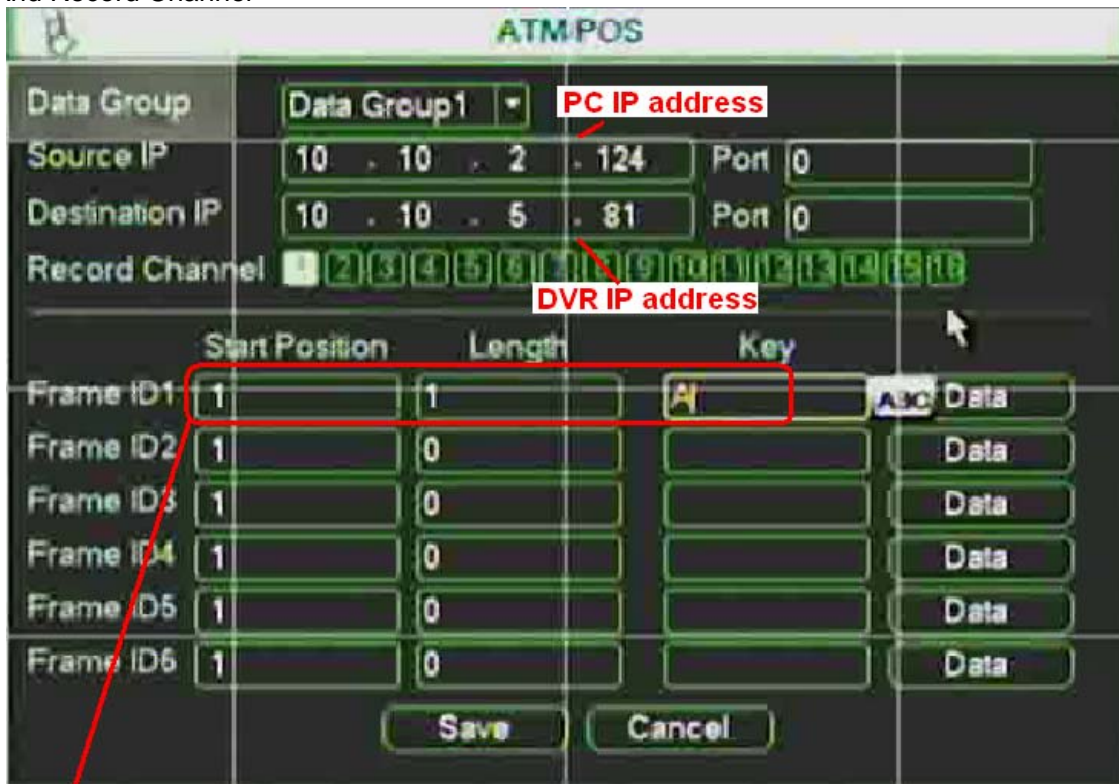

- B. Set Frame ID1 according the picture




- C. Click Data Enter further menu

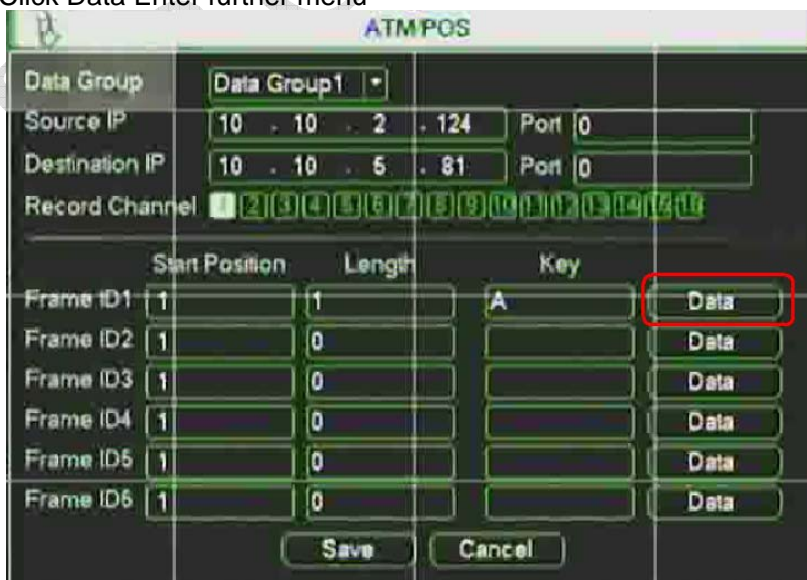

2) ATM/POS Setting

- A、Set the ATM/POS data according the picture
- B、You can set any Title according real needs

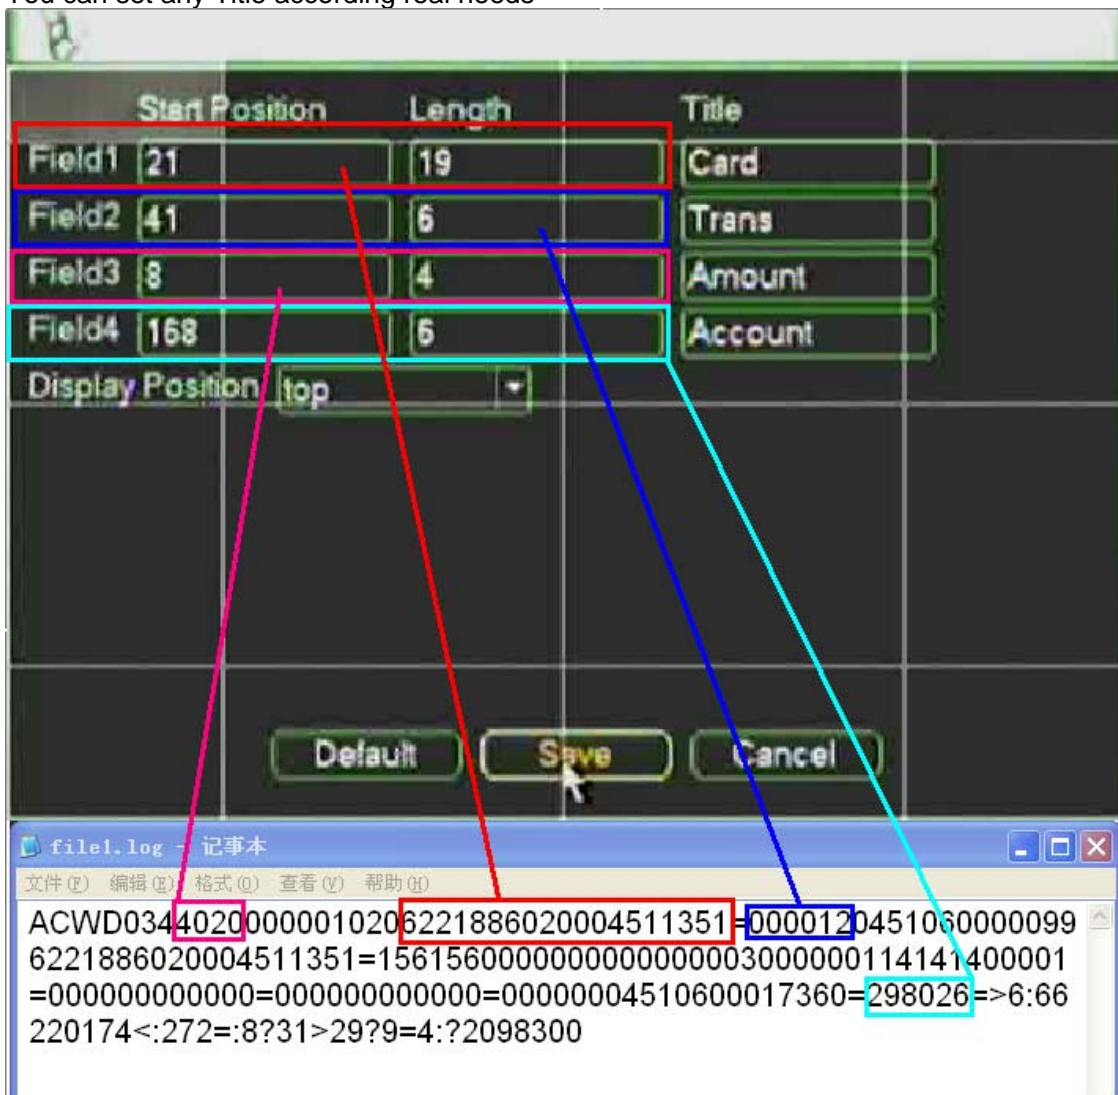

3) Recording Setting

- A、Set Sechedule recording




B. Set Motion recording




4) Run POS simulator


A. Set Pos simulator according to the picture

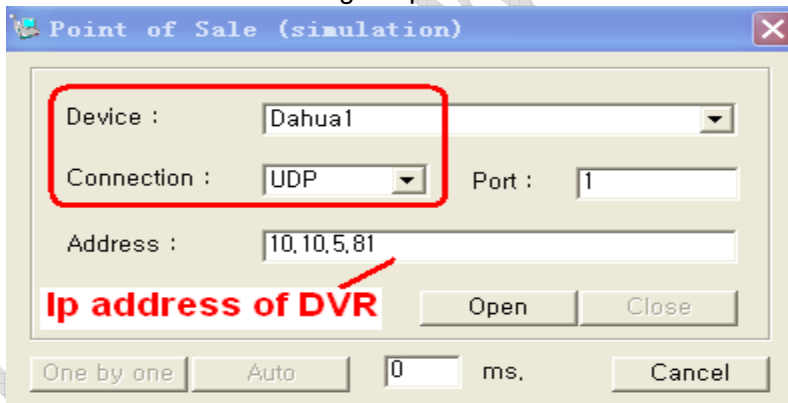

B. Click **Open** to standby

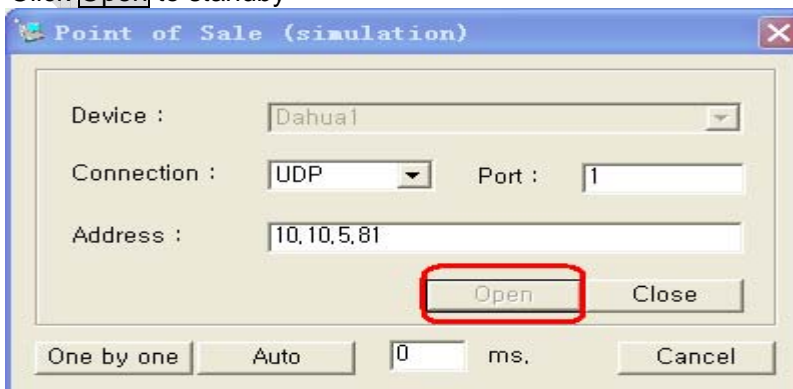

C、Click **One by one** to send data (Dahua1) to DVR

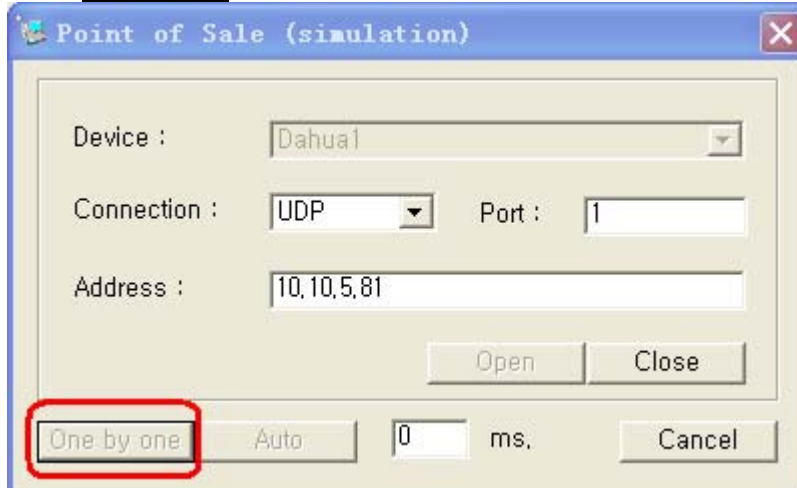

D、The DVR will start Card recording, and the data will overlay to the video

5) Data Overlay



	Start Position	Length	Title
Field1	21	19	Card
Field2	41	6	Trans
Field3	8	4	Amount
Field4	168	6	Account

Display Position: top

Default Save Cancel

file1.log - 记事本

文件(F) 编辑(E) 格式(O) 查看(V) 帮助(H)

```

ACWD0344020000010206221886020004511351=0000120451060000099
6221886020004511351=156156000000000000003000000114141400001
=000000000000=000000000000=00000004510600017360=298026=>6:66
220174<:272=:8?31>29?9=4:?2098300

```

2009-03

Card	6221886020004511351
Trans	000012
Amount	4020
Account	298026