

9" TFT LCD QUAD MONITOR



OPERATING INSTRUCTIONS

Before operating this set, please read these instructions completely

LCD COLOR MONITOR OPERATING INSTRUCTIONS

Congratulations for purchasing our mobile multimedia products, before connecting , operating or adjusting this products ,please read these instructions compactly to make you particular mobile multimedia products to best perform

1.Do not repair it by yourself ,if any trouble occurs ,please immediatly shuts it off and contact our company or local dealer.

This monitor is composed of many precise electronic components , any detachment or reassembling may result damages to the set .

2.Do not exposed it in humid air , dust, vapor, oil lampblack, sunlight, etc.

3.Do not use thinner or any other chemical cleaner .Please choose soft cloth to clean the dirt on the monitor .

4.Keep the monitor far from extremely heating or cooling places.

Operating temperature:-20~50°C

Storage temperature: -20~50°C

5.Prevent the set from falling or struck.

Caution


To ensure security ,please do not operate the monitor watch video or it while driving.

Special hints

There maybe some blink dots in the screen ,it's a common phenomenon in active matrix display technology ,but not a defect or trouble.

LCD COLOR MONITOR OPERATING INSTRUCTIONS


○ MONITOR

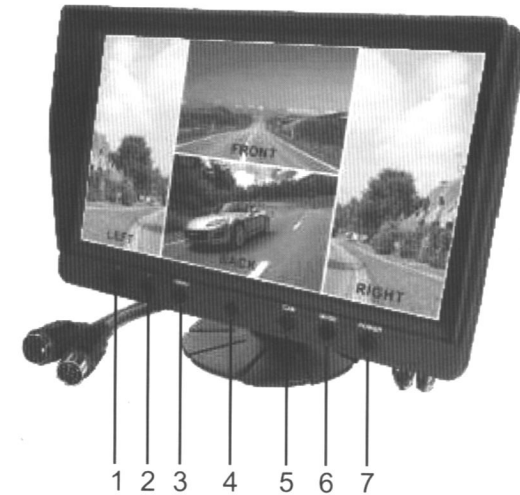


- (1) Volume Decrease button
- (2) Volume Increase button
- (3) Menu
- (4) IR Window
- (5)CAM1>CAM2>CAM3>CAM4
- (6) Single view/ split view /Quad view selectable
- (7) Power switch

LCD COLOR MONITOR OPERATING INSTRUCTIONS

○ Video connections

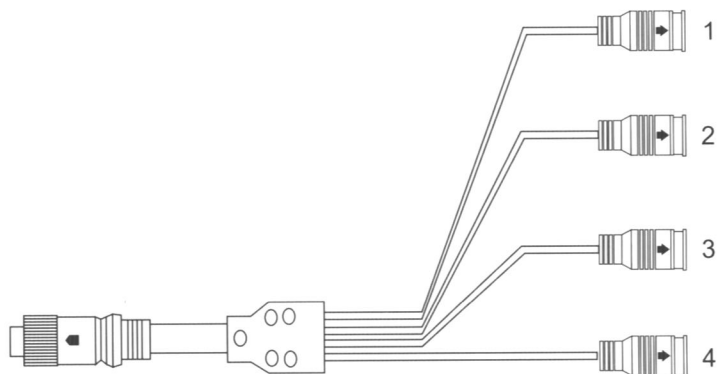

- (1) Monitor to camera 1
- (2) Monitor to camera 2
- (3) Monitor to camera 3
- (4) Monitor to camera 4

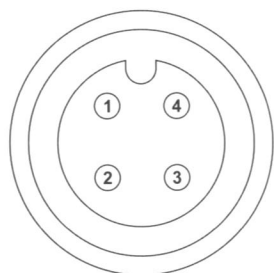


Male:

- 1.Video IN
- 2.Audio IN (or Empty)
- 3.Ground Out
- 4.Power Out +12V

3

LCD COLOR MONITOR OPERATING INSTRUCTIONS

○ Power connections

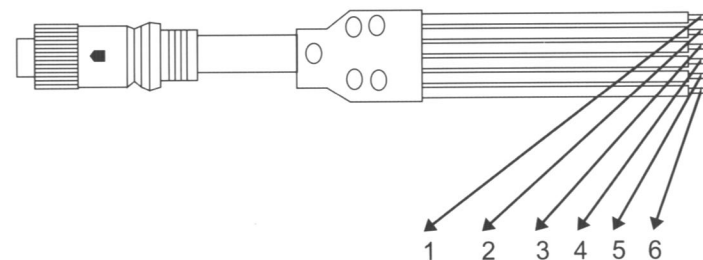


- (1) Brown : **Trigger Cam 1**
- (2) Green : **Trigger Cam 2** (Reversing light power positive. DC12-24V)
- (3) Yellow: **Trigger Cam 3** (Connect positive end of left reversing light. DC12-24V)
- (4) Purple: **Trigger Cam 4** (Connect positive end of right reversing light. DC12-24V)
- (5) Black: **Ground**
- (6) Red : **ACC** (Car key power.DC12V-24V)

4


LCD COLOR MONITOR OPERATING INSTRUCTIONS

○ Bracket accessories



Bracket


For mounting stand style purpose

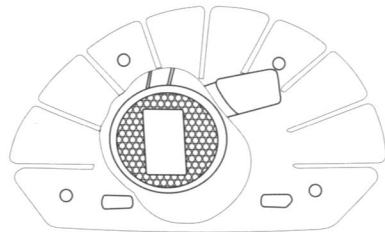

Mounting stand



Bracket

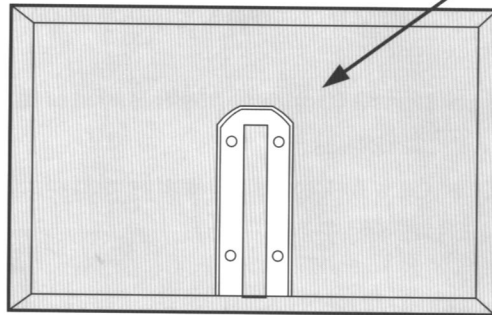

Use Bracket for stand style

LCD COLOR MONITOR OPERATING INSTRUCTIONS

○ Parameters

Display size: 9-inch with sunvisor

Display format: 16:9

System: PAL/NTSC

Power supply: 12-24V

Power : 12W

Picture resolution: 800*RGB*480

○ Accessory parts

Connections wire : 1

Power wire: 1

Bracket: 1