

How to register your ATAs to PLANET SIP Proxy Server (SIP-50)



■ ATA A IP Address: 192.168.0.1 ■ ATA B IP Address: 192.168.0.2

Line Number: 1001 Line Number: 2002

Device configurations on the ATA:

STEP 1:

Log in SIP-50 and create two testing accounts/password: **1001** / **123** (for ATA \underline{A}), and **1002** / **123** (for ATA \underline{B}) for the voice calls.

STEP 2:


Please log in ATA via web browser, browse to the **SIP setting** menu and select the **Domain Service** config menu. In the setting page, please insert the account/password information obtained from your service provider (in this sample, we're using PLANET SIP-50 as the SIP Proxy server for SIP account, call authentications), and then the sample configuration screen is shown below:



VoIP Gateway: vip.planet.com.tw

Service Domain Settings

You could set information of service domains in this page.

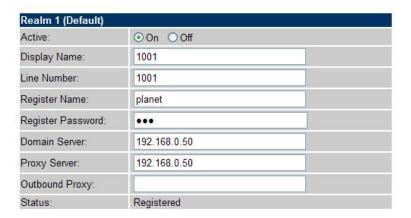

STEP 3:

Repeat the same configuration steps on ATA \underline{B} , and check the machine registration status, make sure the registrations are completed.

Test the scenario:

- 1. Pick up the telephone on ATA A
- 2. Press the keypad: 2002 shall be able to connect to the ATA B
- 3. Then the telephone set in ATA \underline{B} should ring. Please repeat the same dialing steps on ATA \underline{B} to establish the first voice communication from ATA \underline{A}

