


Call Forward Feature Example I - (IP PBX / SIP Proxy Mode)

In the following samples, we'll introduce the Call Forward Feature applications.

In this example, there are three VIP-156 register to IPX-300 and VIP-156_A had set Call Forward function to VIP-156_B.

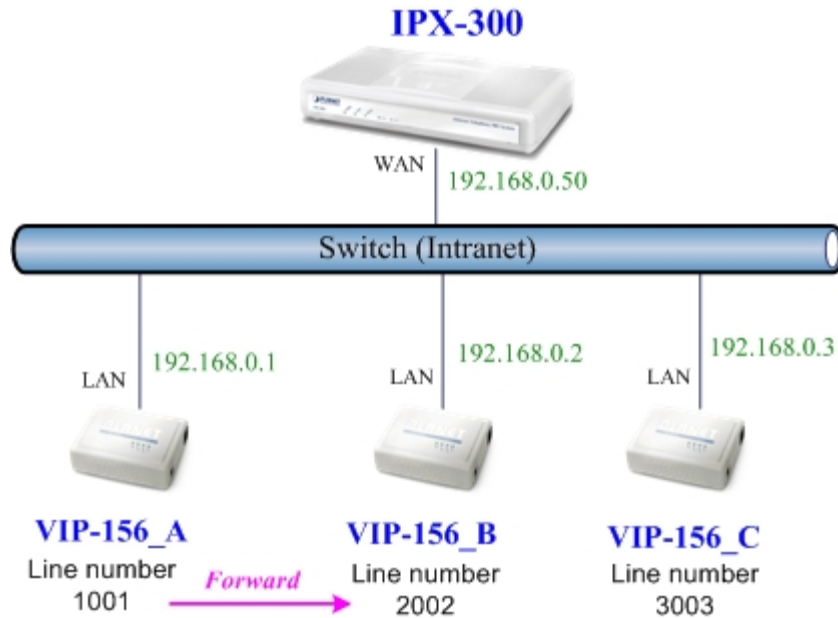

Machine configuration on the VIP-156:

Please log in VIP-156_A via web browser, browse to the **Phone Settings** menu and select the **Call Forward** config menu. In the setting page, please enable the **All Forward** function and fill in the **Name** and **URL** of VIP-156_B, then the sample configuration screen is shown below:

Forward Setting

You could set the forward number of your phone in this page.

All Forward:	<input type="radio"/> Off	<input checked="" type="radio"/> On
Busy Forward:	<input checked="" type="radio"/> Off	<input type="radio"/> On
No Answer Forward:	<input checked="" type="radio"/> Off	<input type="radio"/> On

	Name	URL
All Fwd No.:	VIP-156_B	2002
Busy Fwd No.:		
No Answer Fwd No.:		

No Answer Fwd Time Out:	3	(2~8 Ring)
-------------------------	---	------------

Submit

Reset

Test the scenario:

1. VIP-156_C pick up the telephone
2. Dial the number 1001(VIP-156_A),
3. Because VIP-156_A had set up **All Forward** function to the number 2002(VIP-156_B)
4. The number 2002(VIP-156_B) will ring up then it pick up the telephone and communication with the number 3003(VIP-156_C)




PLANET Technology Corporation

11F, No. 96, Min Chuan Road, Hsin Tien, Taipei, Taiwan, R.O.C.
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528
Email: sales@planet.com.tw Web site: <http://www.planet.com.tw>
VoIP Gateway: vip.planet.com.tw

*Planet reserves the right to change specifications without prior notice.
All brand names and trademarks are property of their respective owners.
Copyright (c) 2006 PLANET Technology Corp. All rights reserved*

Call Forward Feature Example II - (IP to PSTN Mode via IPX-300)

In this example, there are one VIP-157 and two VIP-156 register to IPX-300. The VIP-157_A had set Call Forward function to phone number 1111-2222 (PSTN).

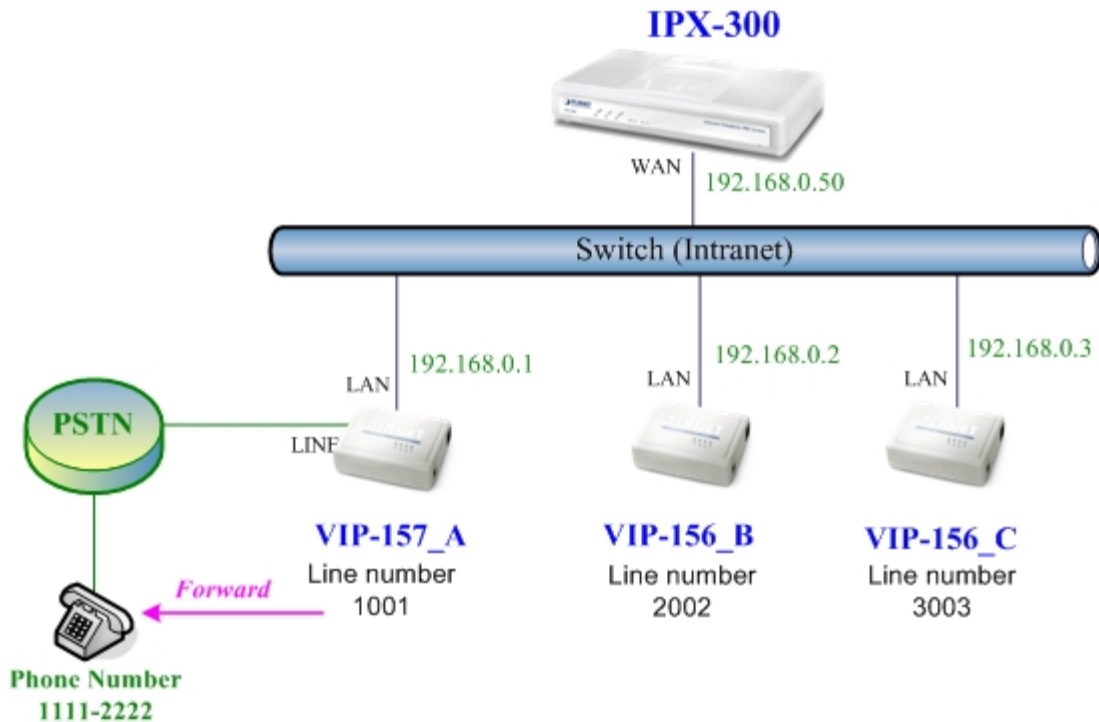

Machine configuration on the VIP-157:

Please log in VIP-157_A via web browser, browse to the **Phone Settings** menu and select the **Call Forward** config menu. In the setting page, please select the **All Forward** function to **PSTN** choice and fill in the **Name** and **URL/Number** of PSTN Phone Number 11112222, then the sample configuration screen is shown below:

Forward Setting

You could set the forward number of your phone in this page.

All Forward:	<input type="radio"/> Off	<input type="radio"/> IP	<input checked="" type="radio"/> PSTN
Busy Forward:	<input checked="" type="radio"/> Off	<input type="radio"/> IP	
No Answer Forward:	<input checked="" type="radio"/> Off	<input type="radio"/> IP	<input type="radio"/> PSTN

	Name	URL/Number
All Fwd No.:	<input type="text" value="PSTN"/>	<input type="text" value="11112222"/>
Busy Fwd No.:	<input type="text"/>	<input type="text"/>
No Answer Fwd No.:	<input type="text"/>	<input type="text"/>

No Answer Fwd Time Out:	<input type="text" value="3"/> (2~8 Ring)
-------------------------	---

Test the scenario:

1. VIP-156_C pick up the telephone
2. Dial the number 1001(VIP-157_A)
3. Because VIP-157_A had set up **All Forward** function to the PSTN Phone Number 11112222
4. The PSTN Phone Number 11112222 will ring up then it pick up the telephone and communication with the number 3003(VIP-156_C)




PLANET Technology Corporation

11F, No. 96, Min Chuan Road, Hsin Tien, Taipei, Taiwan, R.O.C.
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528
Email: sales@planet.com.tw Web site: <http://www.planet.com.tw>
VoIP Gateway: vip.planet.com.tw

Planet reserves the right to change specifications without prior notice.
All brand names and trademarks are property of their respective owners.
Copyright (c) 2006 PLANET Technology Corp. All rights reserved

Call Forward Feature Example III - (PSTN to IP Mode via IPX-300)

In this example, there are one VIP-157 and two VIP-156 register to IPX-300. The VIP-157_A had set Call Forward function to number 2002 (VIP-156_B).

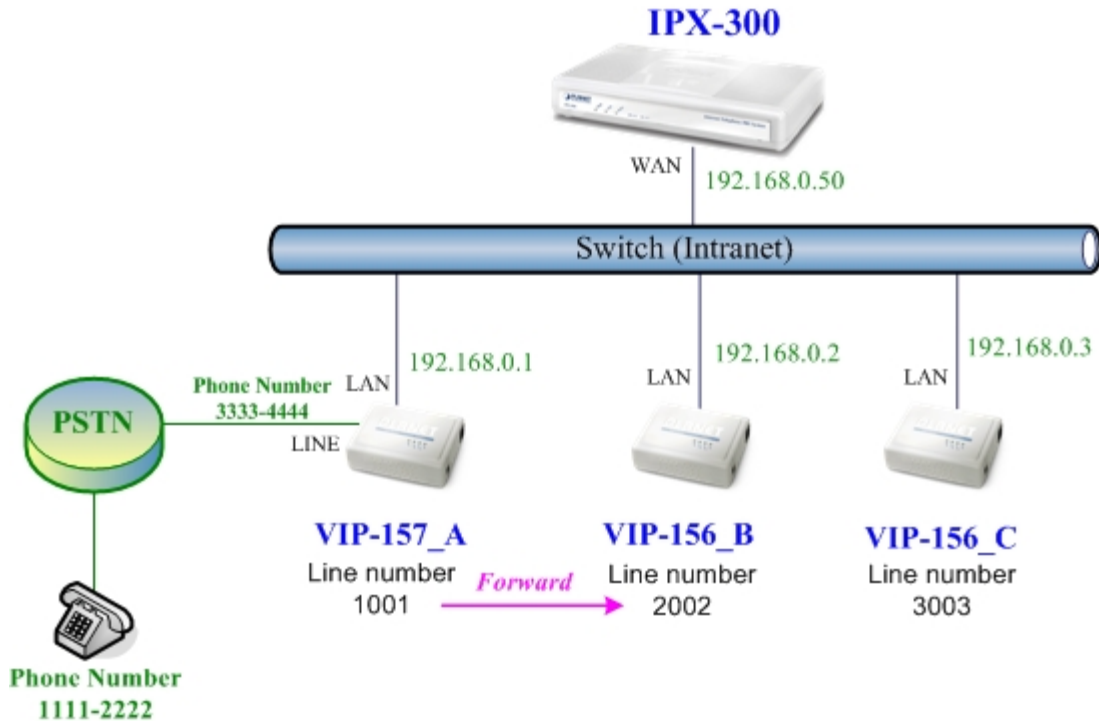

Machine configuration on the VIP-157:

Please log in VIP-157_A via web browser, browse to the **Phone Settings** menu and select the **Call Forward** config menu. In the setting page, please select the **All Forward** function to **IP** choice and fill in the **Name** and **URL/Number** of of VIP-156_B, and then the sample configuration screen is shown below:

Forward Setting

You could set the forward number of your phone in this page.

All Forward:	<input type="radio"/> Off <input checked="" type="radio"/> IP <input type="radio"/> PSTN
Busy Forward:	<input checked="" type="radio"/> Off <input type="radio"/> IP
No Answer Forward:	<input checked="" type="radio"/> Off <input type="radio"/> IP <input type="radio"/> PSTN

	Name	URL/Number
All Fwd No.:	VIP-156_B	2002
Busy Fwd No.:		
No Answer Fwd No.:		

No Answer Fwd Time Out:	<input type="text" value="3"/> (2~8 Ring)
-------------------------	---

Test the scenario:

1. PSTN Phone Number 11112222 pick up the telephone
2. Dial the PSTN Phone Number 33334444(VIP-157_A)
3. Because VIP-157_A had set up **All Forward** function to the number 2002(VIP-156_B)
4. The number 2002(VIP-156_B) will ring up then it pick up the telephone and communication with the PSTN Phone Number 11112222




PLANET Technology Corporation

11F, No. 96, Min Chuan Road, Hsin Tien, Taipei, Taiwan, R.O.C.
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528
Email: sales@planet.com.tw Web site: <http://www.planet.com.tw>
VoIP Gateway: vip.planet.com.tw

Planet reserves the right to change specifications without prior notice.
All brand names and trademarks are property of their respective owners.
Copyright (c) 2006 PLANET Technology Corp. All rights reserved

Call Forward Feature Example IV (Peer-to-Peer Mode)

In this example, there are three VIP-156 and connect with Peer to Peer mode. VIP-156_A had set Call Forward function to VIP-156_B.

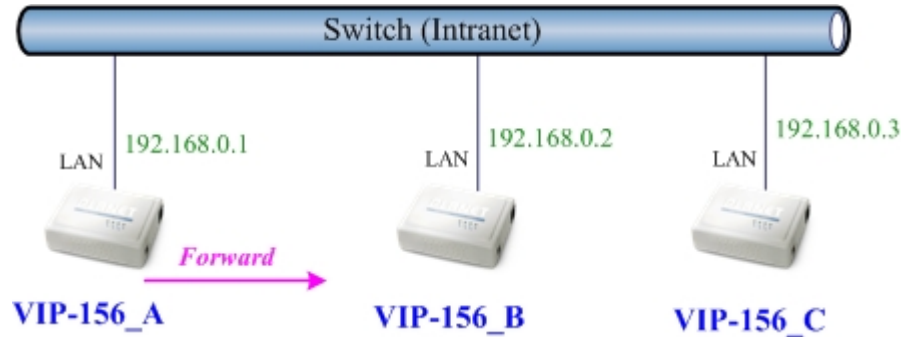

Machine configuration on the VIP-156:

Please log in VIP-156_A via web browser, browse to the **Phone Settings** menu and select the **Call Forward** config menu. In the setting page, please enable the **All Forward** function and fill in the **Name** and **URL** of VIP-156_B, and then the sample configuration screen is shown below:

Forward Setting

You could set the forward number of your phone in this page.

All Forward:	<input type="radio"/> Off <input checked="" type="radio"/> On
Busy Forward:	<input checked="" type="radio"/> Off <input type="radio"/> On
No Answer Forward:	<input checked="" type="radio"/> Off <input type="radio"/> On

	Name	URL
All Fwd No.:	VIP-156_B	192.168.0.2
Busy Fwd No.:		
No Answer Fwd No.:		

No Answer Fwd Time Out:	3 (2~8 Ring)
-------------------------	--------------

Test the scenario:

1. VIP-156_C pick up the telephone
2. Dial the IP Address 192.168.0.1(VIP-156_A)
3. Because VIP-156_A had set up **All Forward** function to the IP Address 192.168.0.2 (VIP-156_B)
4. The IP Address 192.168.0.2 (VIP-156_B) will ring up then it pick up the telephone and communication with the VIP-156_C



PLANET Technology Corporation

11F, No. 96, Min Chuan Road, Hsin Tien, Taipei, Taiwan, R.O.C.

Tel: 886-2-2219-9518 Fax: 886-2-2219-9528

Email: sales@planet.com.tw Web site: <http://www.planet.com.tw>

VoIP Gateway: vip.planet.com.tw

*Planet reserves the right to change specifications without prior notice.
All brand names and trademarks are property of their respective owners.
Copyright (c) 2006 PLANET Technology Corp. All rights reserved*