

**Gigabit Ethernet Converter**  
**1000Base-SX/LX**  
**Multi-mode to Single-mode**

**Trademarks**

Copyright © PLANET Technology Corp. 2000.

Contents subject to revision without prior notice.

PLANET is a registered trademark of PLANET Technology Corp.

The information in this manual is subject to change without notice.

All other trademarks belong to their respective owners.

**FCC Warning**

This equipment has been tested and found to comply with the regulations for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with this user's guide, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

**CE Mark Warning**

This is a Class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

**Revision**

User's manual for PLANET Gigabit Ethernet Converter

**Rev 1.0** (Sep. 2000)

**Part No.** EMGT922

## **1. Overview**

Thank you for purchasing PLANET GT-9XX family Gigabit Ethernet Fiber-optic Converter. This converter is used to convert one type media signal to other type equivalent that allows two type segments connect easily, efficiently and inexpensively. This converter can be used as a standalone unit or as a slide-in module to the 19" media chassis (up to 10 units) for a multi-mode and single-mode Fiber combined networks at a central wiring closet. Please contact with your sales representative for more about the 19" media chassis.

## **2. Model List**

Your Gigabit Ethernet Converter comes with one of the following models.

- ⇒ GT-922 : two on board SC fiber connectors
- ⇒ GT-933 : two on board MT-RJ fiber connectors

In the following sections, the term "GT-9XX" indicates the product family above, the term "MM" and "SM" represent Multi-Mode and Single Mode fiber-optic mode.

## **3. Checklist**


Your GT-9XX carton should contain the following items:

- ⇒ The Gigabit Ethernet Converter
- ⇒ AC-DC Power Adapter (Output: 5VDC, 1 A max.)
- ⇒ This user's guide

If any item is missing or damaged, please consult the dealer from whom you purchased your Gigabit Ethernet Converter.

## 4. Product Outlook

### Right View (GT-922)

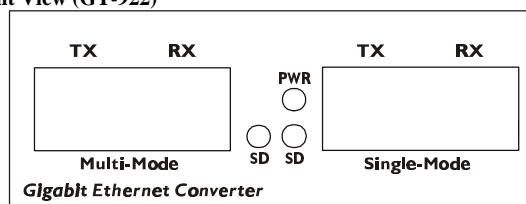

Two fiber-optic connectors, multi-mode on the left, single-mode on the right and three LED indicators.

For other GT-9XX, the outlook of fiber port is accordant to its related port, like. MT-RJ.

### Rear View (GT-9XX)




One DC jack for DC power input.

## 5. Installing the Converter

Please follow these steps to install the converter:

- Turn off the power of the device/station in a network to which the GT-9XX will be attached
- Ensure that there is no activity in the network
- Attach MM fiber cables from the GT-9XX to the MM fiber network. TX, RX must be paired at both ends
- Attach SM/MM\* fiber cables from the GT-9XX to the SM fiber network. TX, RX must be paired at both ends.
- Connect the 5VDC power adapter to the GT-9XX and verify that the Power LED lights up.
- Turn on the power of the device/station, the SD LEDs should light when all cables are attached

\*: Please refers to section 8 for detailed wiring information of the GT-9XX

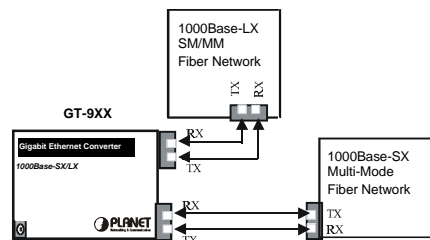

### Note:

- To prevent from optic acceptor malfunction, check the both wires / transmitter before power on the converter.

## 6. Duplex Mode setting

The GT-9XX is a transparent device between the two fiber networks, please make sure the both networks are set to the same duplex environment, or you may get a worse performance in both

networks. Connect with full-duplex Gigabit Ethernet networks are strongly recommended.

## 7.LED indication

LED	COLOR	DESCRIPTION
SD	Green	Blinks when any data packet is present
	Green	Lit when Fiber connection is good
PWR	Green	Lit when +5VDC power detected

## 8. Cable Connection Parameter

The wiring details are as below:

Cables:

Standard	Fiber Type	Cable Specification
1000Base-SX	Multi-mode	50/125μm or 62.5/125μm (850nm)
1000Base-LX (1300nm)	Multi-mode	50/125μm or 62.5/125μm
	Single-mode	9/125μm

Wiring Distances:

Standard	Fiber	Diameter (micron)	Modal Bandwidth (MHz * km)	Max. Distance (meters)
1000Base-SX	MM	62.5	100	220
		62.5	200	275
		50	400	500
		50	500	550
1000Base-LX	MM	62.5	5	550
		50	4	
		50	5	
	SM	9	N/A	5000*

**\*Note:** The Single-mode port (100Base-LX port) of GT-922 is complied with LX 5 kilometers and provides additional margin allowing for a **10 kilometers** Gigabit Ethernet link on single mode fiber

## 9. GT-9XX Technical Specifications

The GT-9XX comes with the following standard features:

- **Standard** : IEEE802.3z, Gigabit Ethernet 1000Base-SX/LX
- **Connectors** :
  - ⇒ One Fiber-optic, 850nm wavelength, MM
  - ⇒ One Fiber-optic, 1300nm wavelength, SM/MMConnector-type different with models
- **Data Transfer Rate** : 1000Mbps
- **Duplex mode support** : Full or half-duplex mode
- **LED indicators** : PWR, SX SD , LX SD
- **Power Requirement** : 5V ,1A
- **Ambient Temperature** : 0° to 50°C (operating)
- **Humidity** : 5% to 90%
- **Dimension** : 26 x 70 x 97mm (HxWxD)
- **Cable** :
  - ⇒ MM: 50/125 *mm* or 62.5/125 *mm* optic fiber
  - ⇒ SM: 9/125 *mm* optic fiber
- **Wiring** : Please refer to Section 8

Connecting to the Gigabit Ethernet products, please refer to the device's Technical Manual.

## 10. Power information

The power jack of GT-9XX is with 2.5mm in the central post and required +5VDC power input. It will conform to the bundled AC-DC adapter and Planet's Media Chassis. Should you have the problem to make the power connection, please contact your local sales representative.

Please keep the AC-DC adapter as spare parts when your GT-9XX is installed to a Media Chassis.

Part No.: **EMGT922**