





TESTMON351H 3.5" TFT LCD Monitor User Manual

1. To Avoid Electric Shock, Please do keep your hands dry when connect the power.
2. To Avoid the damages, Please DO NOT connect AC power directly to this product.
3. Please contact your supplier for any outstanding problems.

Connection Diagram:

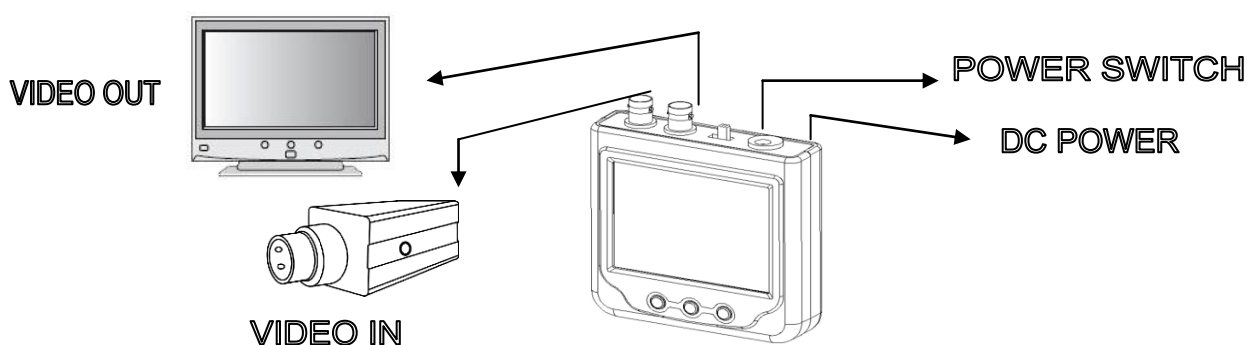


Cable Connection:

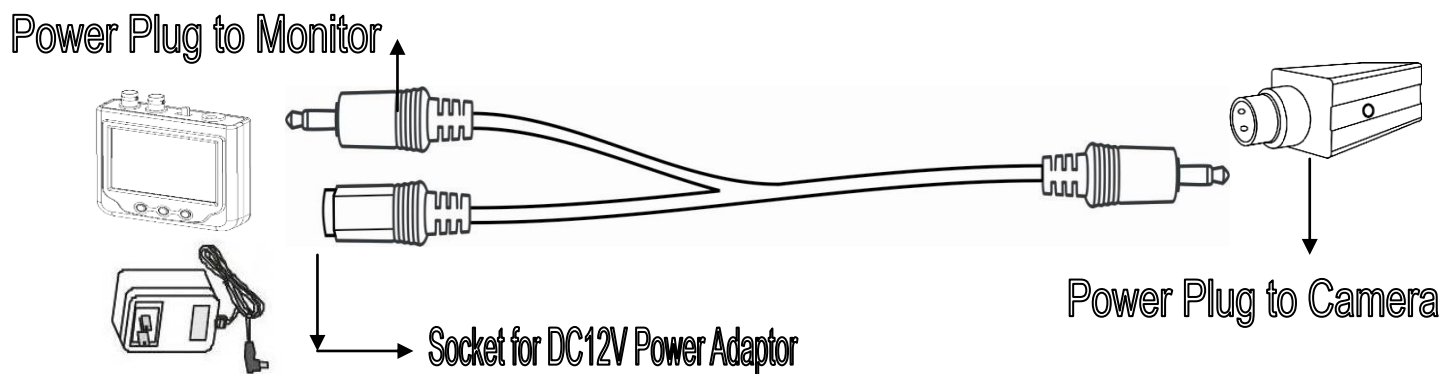

OSD FUNCTION:

* Press [MENU] for 3 Second to enter OSD Function.

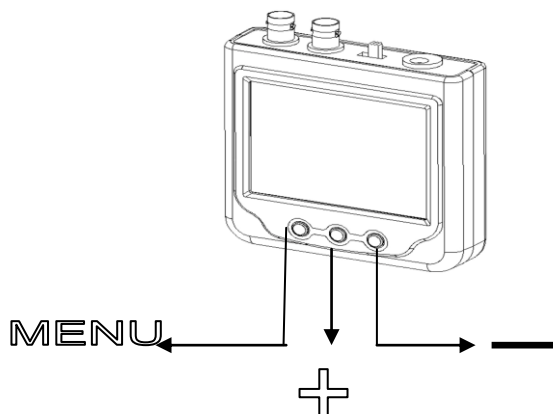

SPECIFICATION:

Screen Size	3.5 inch Digital TFT LCD
Resolution (dot)	960 (W) X 234 (H) mm
Contrast Ratio	400:1
View Angle	L=60°, R=60°, T=50°, B=55°
Color Structure	R.G.B. STRIPE
Backlight	LED 6 type
Video Signal	NTSC / PAL auto-switch
Input Signal	1.0Vp-p 75 Ohm
Power	AA Alkaline Battery X 8pcs or DC12V Adaptor
Power Consumption	2W max.
Brightness	290cd/m2
Response Time	Typ. 15ms
Operation Temperature	-0°C~50°C
Case Material	ABS HB
Storage Temperature	-30°C~80°C
Outlook Size & Weight	96(L) X 98(W) X 25(D)mm / 620g with accessories and package
OSD Function	Brightness / Contrast / Rest
Standard Accessories	Armful Bag / BNC with Cable / Power Cable / Battery Case
Optional Accessories	2600mA NI-MH AA Battery X 8PCS + Battery Charger