



Quick Installation Guide

ADSL 2/2+ Modem

ADE-2400

Important Safety Instructions


- Do not use the ADSL modem in high humidity or high temperatures.
- Do not use the same power source for the ADSL modem as other equipment.
- Do not open or repair the case yourself. If the ADSL modem is too hot, turn off the power immediately and have it repaired at a qualified service center.
- Avoid using this product and all accessories outdoors.
- Place the ADSL modem on a stable surface.
- Only use the power adapter that comes with the package. Using a different voltage rating power adaptor may damage the router.

Package Content

- ADE-2400 Unit
- Power Adapter
- Quick Installation Guide
- RJ-11 (ADSL) cable
- RJ-45 cable

If any of the above items are missing or damaged, contact your local dealer for support.

Top-mounted LEDs of ADE-2400

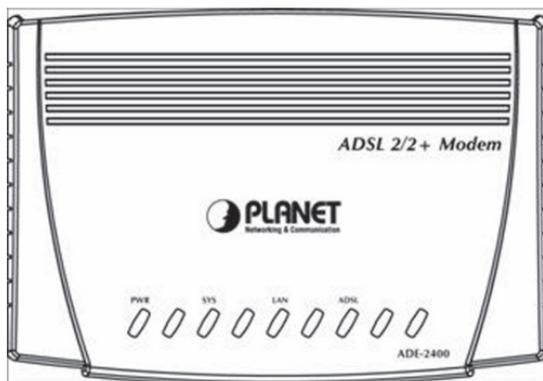

LED Definition

LED	Meaning
1 ADSL:	Lit when successfully connected to an ADSL DSLAM ("linesync").
2 LAN :	Lit when connected to an Ethernet device. Green for 100Mbps; Orange for 10Mbps. Blinking when data is Transmitted / Received.
3 SYS :	Lit when the system is ready.
4 PWR :	Lit when power is ON.

Rear Panel



Port		Meaning
1	9V AC	Connect the supplied power adapter to this jack.
2	RESET	After the device is powered on, press it to reset the device or restore to factory default settings. Reset the device 6 seconds above to restore the factory default settings (this is used when you can not login to the router, e.g. forgot the password)
3	LAN	Connect a UTP Ethernet cable (Cat-5 or Cat-5e) to one of the four LAN ports when connecting to a PC or an office/home network of 10Mbps or 100Mbps.
4	ADSL	Connect the supplied RJ-11 ("telephone") cable to this port when connecting to the ADSL/telephone network.

Connecting ADSL 2/2+ Modem

1. Windows XP or 2003

If you have Windows XP or 2003, you may use the built-in PPPoE connecting program in these OS. The following example is how to configuring PC in Windows XP.


1. Go to **Start / Settings / Control Panel**. In the Control Panel, please click **New Connection Wizard**.
2. You will see the New Connection Wizard on the screen. Please click "**Next**".




3. Select "Connect to the Internet" and click "Next".




4. Select "Set up my connection manually" and click "Next".

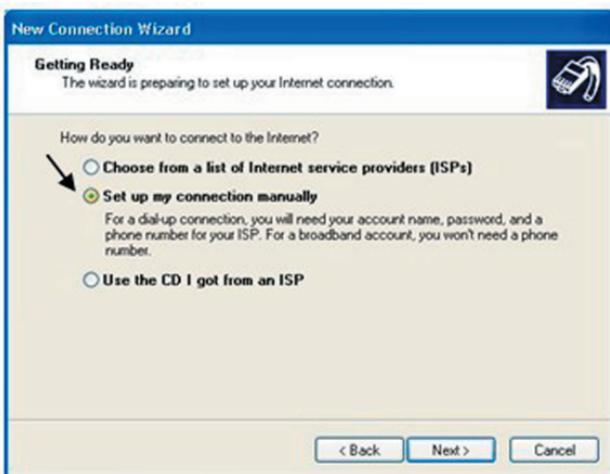

5. Select **"Connect using a broadband connection that requires a user name and password"** and click **"Next"**.

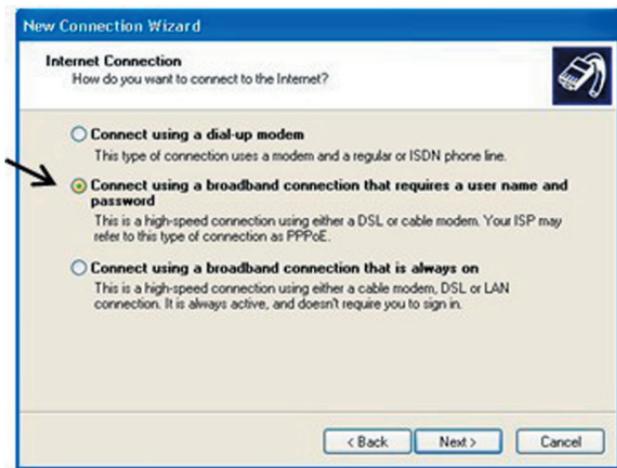

6. In the window, type the name of your ISP in the following box, and click **"Next"**.

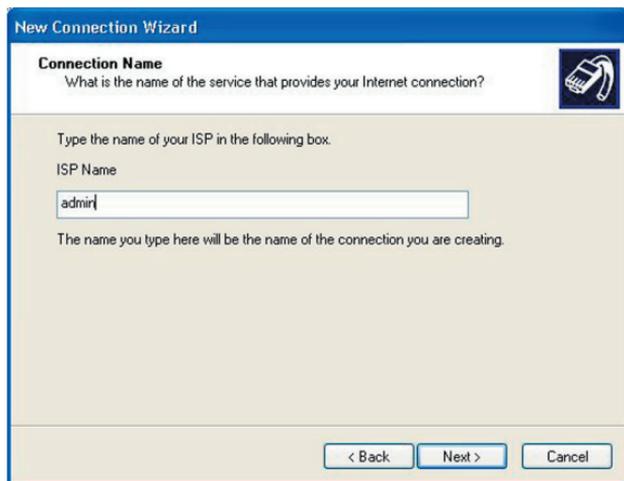

7. Type an ISP account name and password then write down the information and store it in a safe place, and click "**Next**".

New Connection Wizard

Internet Account Information
You will need an account name and password to sign in to your Internet account.

Type an ISP account name and password, then write down this information and store it in a safe place. (If you have forgotten an existing account name or password, contact your ISP.)

User name:

Password:

Confirm password:

Use this account name and password when anyone connects to the Internet from this computer

Make this the default Internet connection

Turn on Internet Connection Firewall for this connection

< Back Next > Cancel

8. You have successfully completed the steps. Please click "**Finish**".

New Connection Wizard

Completing the New Connection Wizard

You have successfully completed the steps needed to create the following connection:

admin

- Make this the default connection
- This connection is firewalled
- Share with all users of this computer
- Use the same user name & password for everyone

The connection will be saved in the Network Connections folder.

Add a shortcut to this connection to my desktop

To create the connection and close this wizard, click Finish.

< Back Finish Cancel

2. The WAN Adapter from Your ISP:

1. Please ask your ISP about PPPoE connecting software. Install the PPPoE connecting program provided by your ISP in the PC. Click **Connect** icon on the desktop or in the programs. The following window should appear. Enter the "**User name**" and "**Password**" provided by your ISP.



2. Click **Connect** and get ready to surf the Internet!

Further Configuration

If you have any difficulty on resolving the problem while installing or using the ADE-2400, please feel free to contact PLANET for support.

Part No.:2011-B50270-000

