


## How to register your VIP-154T to PLANET SIP Proxy Server (SIP-50)

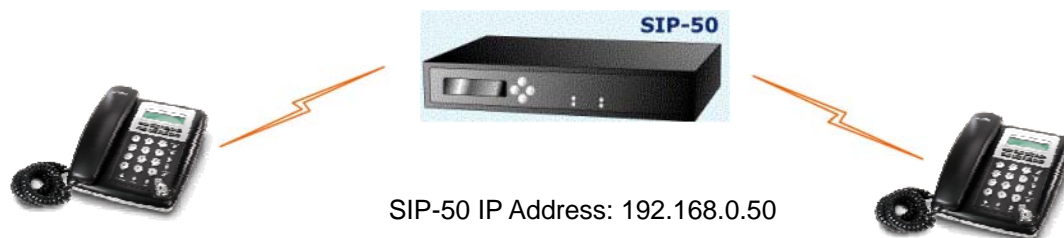

- VIP-154T IP Address: 192.168.0.1  
Line Number: 1001

- VIP-154T IP Address: 192.168.0.2  
Line Number: 2002

### Machine configuration on the VIP-154T:

#### STEP 1:

Log in SIP-50 and create two testing accounts/password: 1001/123 (for VIP-154T A), and 1002/123(for VIP-154T B) for the voice calls.

#### STEP 2:

Please log in VIP-154T A via web browser, browse to the **SIP setting** menu and select the **Domain Service** config menu. In the setting page, please insert the account/password information obtained from your service provider (in this sample, we're using PLANET SIP-50 as the SIP Proxy server for SIP account, call authentications), and then the sample configuration screen is shown below:

# Service Domain Settings

You could set information of service domains in this page.

Realm 1 (Default)	
Active:	<input checked="" type="radio"/> On <input type="radio"/> Off
Display Name:	1001
Line Number:	1001
Register Name:	planet
Register Password:	•••
Domain Server:	192.168.0.50
Proxy Server:	192.168.0.50
Outbound Proxy:	
Status:	Registered

### STEP 3:

Repeat the same configuration steps on VIP-154T B, and check the machine registration status, make sure the registrations are completed.

### Test the scenario:

To verify the VoIP communication, you may make calls from SIP client (VIP-154T A) 1001 to the number 1002 (VIP-154T B) or reversely make calls from SIP client (VIP-154T B) 1002 to the number 1001 (VIP-154T A )



#### PLANET Technology Corporation

11F, No. 96, Min Chuan Road, Hsin Tien, Taipei, Taiwan, R.O.C.  
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528  
Email: [sales@planet.com.tw](mailto:sales@planet.com.tw) Web site: <http://www.planet.com.tw>  
VoIP Gateway: [vip.planet.com.tw](http://vip.planet.com.tw)

*Planet reserves the right to change specifications without prior notice.  
All brand names and trademarks are property of their respective owners.  
Copyright (c) 2006 PLANET Technology Corp. All rights reserved*