




SDOMEOP / SDOMEIP

Nastavení parametrů pro PTZ

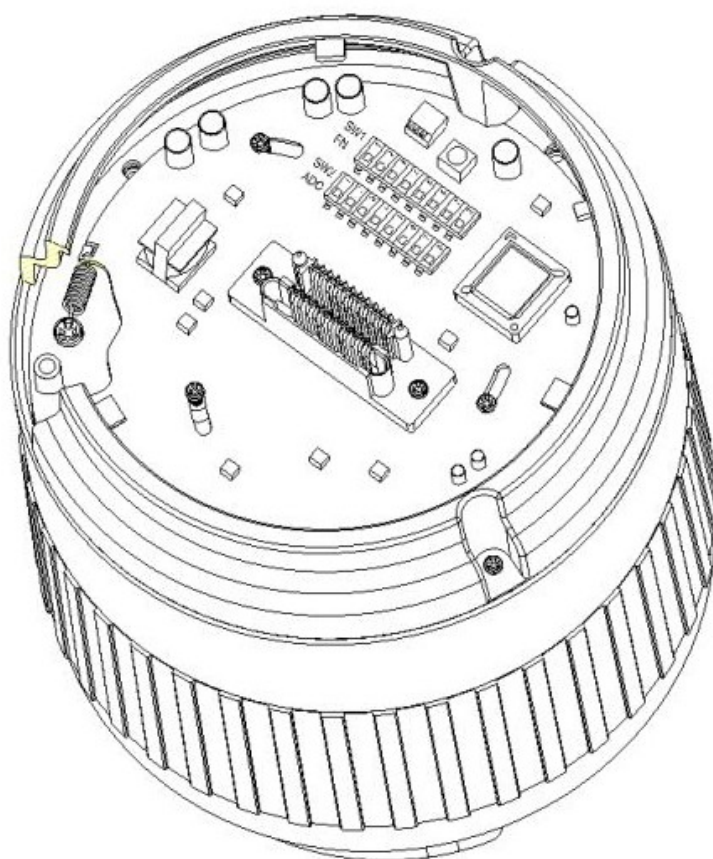

Nastavení komunikační rychlosti a protokolu (SW1) :

	Nastavení přepínačů SW1							
	ON 1	2	3	4	5	6	7	8
2400bps								
4800bps						○		
9600bps							○	
19200bps					○	○		

Protokol	Nastavení přepínačů SW1							
	ON 1	2	3	4	5	6	7	8
FACTORY								
VCL	○							
PELCO_P		○						
PELCO_D	○	○						
MOLYX			○					
VICON	○		○					
DIAMOND		○	○					
KALATEL	○	○	○					
HUNDA				○				
BBV*	○		○		○			
SANTACHI		○		○				
PELCO_C*	○	○		○				
UNIVISION_V1*			○	○				
UNIVISION_V2*	○		○	○				
PHILIPS*		○	○	○				
AD*	○	○	○	○				
ADT SECUPRO					○			
PANASONIC	○				○			
保留		○			○			
SENSORNET	○	○			○			
KDEC300			○		○			

Nastavení adresy ID (SW2):

Pozice „ON“ značí zapnuto.

ID	Nastavení přepínače SW2							
	ON 1	2	3	4	5	6	7	8
0								
1	○							
2		○						
3	○	○						
4			○					
5	○		○					
6		○	○					
7	○	○	○					
8				○				
9	○			○				
10		○		○				
11	○	○		○				
12			○	○				
13	○		○	○				
14		○	○	○				
15	○	○	○	○				
16					○			
17	○				○			
18		○			○			
19	○	○			○			
20			○		○			
21	○		○		○			
22		○	○		○			
23	○	○	○		○			
24				○	○			
25	○			○	○			
26		○		○	○			
27	○	○		○	○			
28			○	○	○			
29	○		○	○	○			
30		○	○	○	○			
31	○	○	○	○	○			
32						○		
33	○					○		
34		○				○		
35	○	○				○		
36			○			○		
37	○		○			○		
38		○	○			○		
39	○	○	○			○		
40				○		○		
41	○			○		○		
42		○		○		○		
43	○	○		○		○		